




Professional Photographic Equipment

INSTRUCTIONS

LE-60 Leveling Base

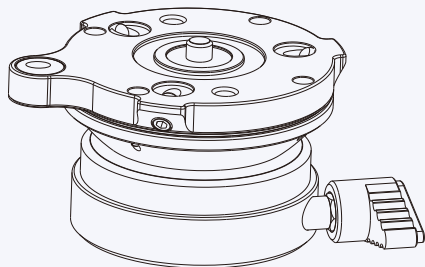

Guangdong SIRUI optical co.,ltd

Address: The Third Industrial District, Wuguishan Town, Zhongshan City, Guangdong, China
Tel: 0086-760-88897373 Fax: 0086-760-88207062 Service Hotline: 0086-400-8302299
E-mail: info@sirui-photo.com http://www.sirui.com P.C: 528458

1. Know your leveling base


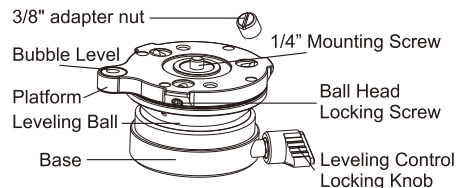


Fig 1

2. Attaching your leveling base

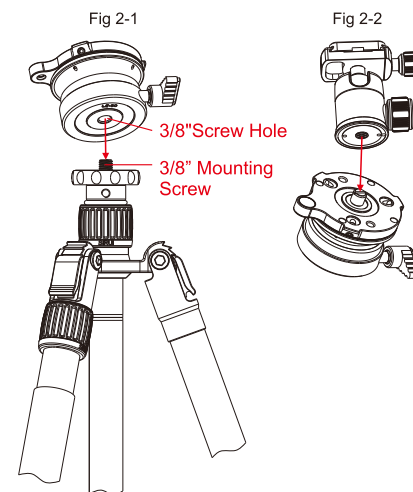

3. Using the Leveling base

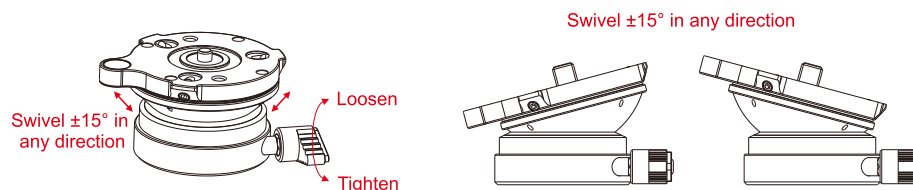


Fig 3

1. Know your leveling base

2. Attaching your leveling base

- ① Attach the Leveling base onto the tripod as shown in Fig. 2-1, align the 3/8" screw hole of the base with the 3/8" mounting screw of the tripod.
- ② If you want to directly attach a camera to the Leveling Base, remove the 3/8" adapter nut from the 1/4" Mounting Screw. If you want to connect a ball head onto the Leveling Base, make sure the 3/8" adapter nut is on the 1/4" Mounting Screw and attach as shown in Fig. 2-2.

3. Using the Leveling base

- ① To prevent a ball head from unscrewing from the Leveling Base, use an Allen key to adjust the Ball Head Locking Screw so that it presses against the base of the Ball Head. Do not use excessive force. Use all 3 Ball Head Locking Screws for best results. Remember to loosen the Ball Head Locking Screw before removing the ball head.
- ② As shown in Fig. 3, loosen the Leveling Control Locking Knob and adjust the Leveling Ball to the desired angle (use the bubble level on the platform for precise alignment), tighten the Leveling Control Locking Knob.

Specifications are subject to change without notice.

LE-60	60/2.4	44/1.7	0.29/0.64	30/66.1
Diameter	Height	Height	Weight	Maximum Load
mm/inch	mm/inch	mm/inch	Kg/lb	Kg/lb
⌀	↑↓	↑↓	⬢	⬢

LE-60 Data Chart