




SIRUI, Capturing Your Imagination!

# Instructions

## AM-404FL Professional Quick Setup Monopod



V1.0 2023.09.01


**GUANGDONG SIRUI OPTICAL CO.,LTD.**

Add: The Third Industrial District, Wuguishan Town, Zhongshan City,  
Guangdong, China (Zip Code: 528458)

Tel: 86-760-88897373 Fax: 86-760-88207062


E-mail: [info@sirui-photo.com](mailto:info@sirui-photo.com) Website: [www.sirui.com](http://www.sirui.com)

## 1. Parts Name

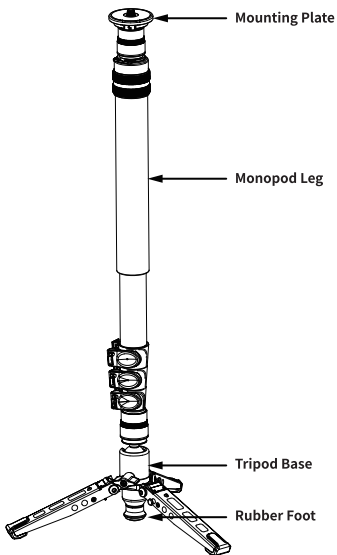




## 2. Retractable Legs

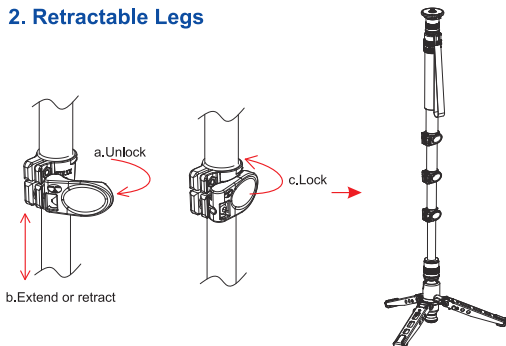


## 3. 360° Panning System

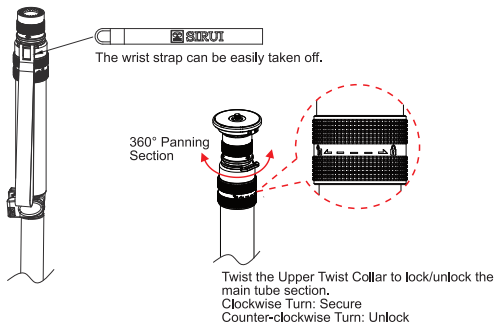


## 4. Friction Adjustments and All-Round 36° Tilting

4.1 Use the Ball Locking Knob to lock the ball or adjust the friction.

Clockwise Turn: Secure  
Counter-clockwise Turn: Unlock



4.2 Loosen the Ball Locking Knob to tilt the monopod 36° in any direction.




Pull out the knob to change its position.


## 5. Tripod Base Setup

### 5.1 Open the base.


Attach a head or other photography equipment to the Mounting Platform.

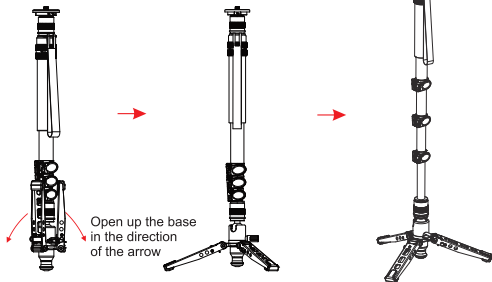

### 5.2 Fold up the base

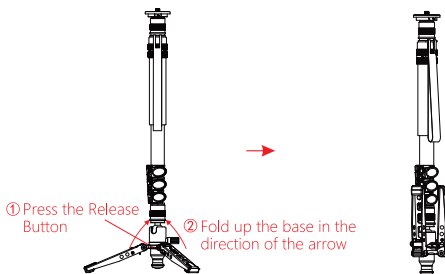


## 6. Inverting the 3/8" and 1/4" Mounting Screw

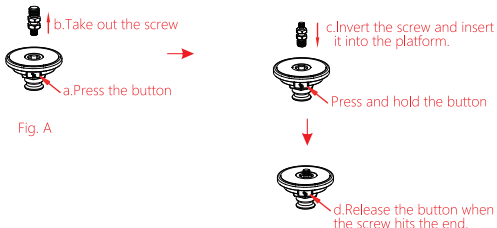


Inverting the screw:

1. Press the button on the side of the platform to take out the screw.
2. Invert the screw and insert it into the platform. Don't release the button until the screw hits the end.

## 7. Monopod

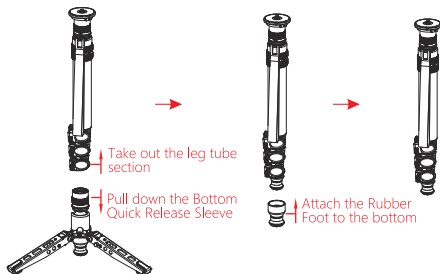

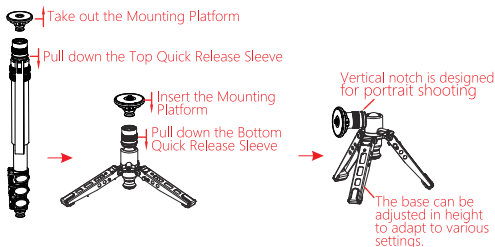

## 8. Low Profile Tripod



## AM-404FL

### Professional Quick Setup Monopod Specs

							
	Section	Max Dia mm/inch	Min Dia mm/inch	Max H mm/inch	Min H mm/inch	Max H mm/inch (without base)	Min H mm/inch (without base)
AM-404FL	4	36/1.42	25/0.98	1900/74.80	730/28.74	1790/70.47	610/24.02

	
Weight kg/lb	Load kg/lb
1.40/3.09	12/26.45

## Attention:

※ Specifications of products may be changed without notice.



Do not exceed the recommended load limit of the head and/or tripod. (Please refer to product specifications.)



Please make sure that the locks are securely tightened when in use.



This product should not be used in environments that exceed the following conditions (-40 ~ +100°C/-40 ~ +212°F). And, when used in damp, dirty or dusty environments, please clean and dry thoroughly after use, to assure proper functioning in the future. It is not recommended to expose this product to saltwater. If exposed, please clean with mild soap and warm water and towel dry.



Please keep from high temperatures and direct exposure to bright sunlight for extended periods of time



Please do not leave the equipment alone in a public place, which can be an inconvenience or hazard to others.



To protect your camera gear, please remove it from the tripod/ball head when transporting from place to place.



Please use a soft towel with warm water and mild soap to clean the locking system and gliding parts when necessary. Towel dry before storing the tripod.



Under most situations, there is no need to lubricate any parts of this product. The addition of most lubricants will gum up the mechanisms and reduce their normal gliding characteristics. Please call or email us if you have any questions or special needs.



Please keep this product away from all electrical power sources.



## CAUTION

Please remove the camera from the tripod when changing the position of the tripod. Do not place the tripod, with camera attached, over your shoulder or carry the tripod horizontally by the legs. Strong shaking may cause damage of the screw in the mounting plate and/or the camera. Please extend the legs from the biggest tube to smallest tube; close the legs from the smallest tube to biggest tube, to avoid leg joint bushing damage.

# WARRANTY CARD / INFORMATION

**Dear SIRUI Customer,**

Thank you for your purchase of SIRUI Professional Products!

SIRUI warrants that your purchase is free from defects in materials and workmanship under normal use during the Limited Warranty Period. The Warranty begins on the original date of purchase on your sales receipt and is not transferrable. If service is required, a copy of the sales receipt must be included with an explanation of the problem.

Product	Warranty Length
Tripods / Monopods / Accessories	6 years
Humidity Control Cabinet (Cabinet)	
Humidity Control Cabinet (Electronics)	3 years

Model: \_\_\_\_\_ Date: \_\_\_\_\_

Store: \_\_\_\_\_ Serial Number: \_\_\_\_\_

**Warranty coverage can differ from region to region.**

**Please see the contact information below for product registration, information and service for the region the product was purchased in.**

SIRUI 6 (six) Year Limited Warranty (3 Year Warranty for Electronic Parts). This warranty shall be limited to repair, adjustment and/or replacement at SIRUI or its authorized distributors option, of defective parts, free of charge (except the cost of transportation to the distributor/service center). Responsibility is limited to the actual cost of the item. Call or Email with questions and service before sending any product to the center in your region. Below is a listing of contact information for Product Registration, Service Inquiries and Questions. SIRUI will not be responsible for expenses or inconveniences, or consequential damages to equipment, or by breach of any expressed or implied warranties.

## **Limitations:**

Warranty is not transferable.

This warranty covers all defects encountered in normal use of the equipment and does not apply in the following cases:

1. If the equipment has been serviced by other than an authorized SIRUI Service Center.
2. Damage to the equipment is due to modification (including but not limited to, the removal of ballhead clamps), overloading, mishandling, abuse, accident, sand\*, corrosives, water damage\* or not following operating instructions.
3. No valid proof of purchase is provided.
4. Damage caused by acts of nature (including, but not limited to fires, floods or earthquakes).

Warranty coverage can differ from region to region. Please see contact information below for product registration, information and service for the region the product was purchased in.

**Warranty Address and Contact Information:**

(Please contact the seller or the local distributor where the product was purchased for warranty issues or questions and before any product is sent.)

**1. Guangdong SIRUI Optical Co., Ltd.**

The Third Industrial District, WuguishanTown, ZhongshanCity, Guangdong, China

Tel:0086-760-88897373 Fax:0086-760-88207062

[Http://www.sirui.com](http://www.sirui.com) E-mail: [info@sirui-photo.com](mailto:info@sirui-photo.com)

Service Hotline: 0086-400 830 2299

Complaint Hotline: +86-181 6563 9388

(Monday to Friday: 8:15am~12:15pm, 14:00pm~18:00pm)

**2. SIRUI USA, LLC**

Add: 29 Commerce Court Verona, NJ 07044

[www.sirui.com](http://www.sirui.com)

Service: Toll Free 866-373-0829 E-mail: [info@sirui.com](mailto:info@sirui.com)

**FOR PRODUCTS PURCHASED IN THE USA PLEASE SEE:**

For full details on USA Warranty Terms and Limitations:

<https://www.siruiusa.com/warranty.html>

To register products: <https://www.siruiusa.com/product-registration.html>

**3. European Service Center**

Add: SIRUI Optical GmbH • Ernst-Augustin-Str.1a • 12489 Berlin • Germany

Phone: +49 30 991 94 94 00 • Email: [Info@siruioptical.eu](mailto:Info@siruioptical.eu)






影像随心 思锐随行

# 使用说明

## AM-404FL专业快拆独脚架



V1.0 2023.09.01

### 广东思锐光学股份有限公司

地址：广东省中山市五桂山第三工业区

邮编：528458

电话：0760-88897373 传真：0760-88207062 服务热线：400 830 2299


邮箱：info@sirui-photo.com

网址：www.sirui.com


投诉电话：18165639388

(仅限工作日 8:15~12:15, 14:00~18:00)


## 1. 认识产品

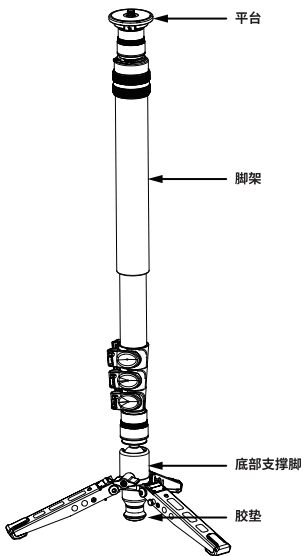

## 2. 脚管可伸缩

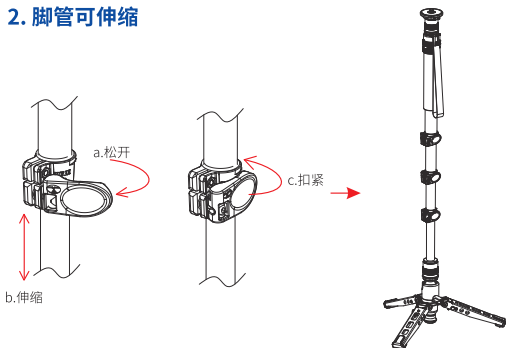


## 3. 快装座具有旋转及旋转锁定功能

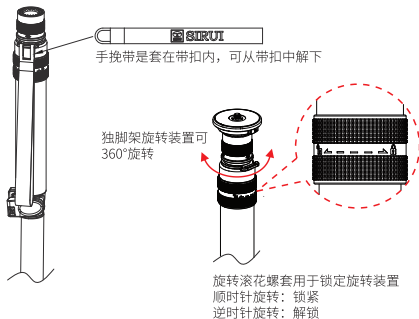


## 4. 可以调节阻尼大小和万向摆动功能

4.1 球头旋钮用于锁定球头的转动和调节球头阻尼大小。



4.2 球头旋钮用于固定球头的万向摆动（主杆可以 $36^{\circ}$ 万向摆动）。




向外拉起旋钮，可旋转旋钮调整位置。


## 5. 摄影/摄像功能

连接云台或摄像设备


### 5.1 支撑三脚架的打开

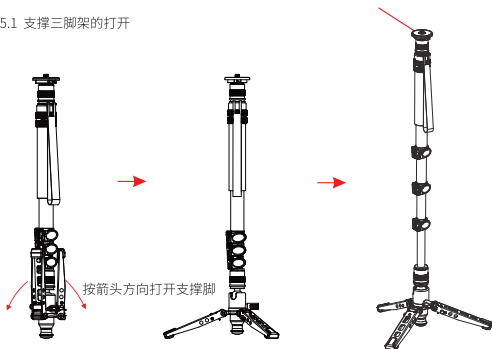

### 5.2 支撑三脚架的收拢

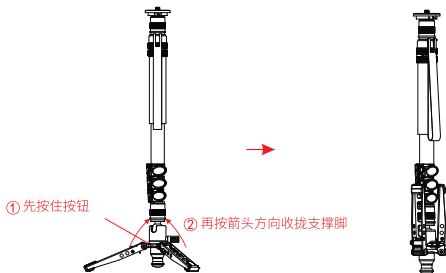


## 6. 快速转接平台可倒转安装3/8“或1/4”转接螺丝

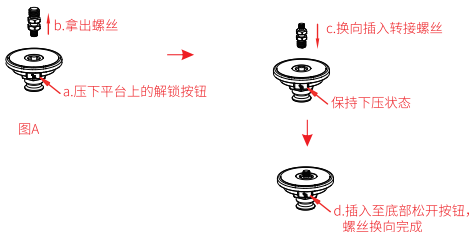


螺丝快速换向操作说明：

- 1、压下平台上的解锁按钮，此时螺丝解锁，可直接拿出，见图A。
- 2、保持解锁按钮下压状态，将螺丝换向后插入孔内（螺丝六角部对准平台上六角孔），松开解锁按钮，转接螺丝将被自动卡紧于孔内，换向完成。

## 7. 可以拆分成普通独脚架

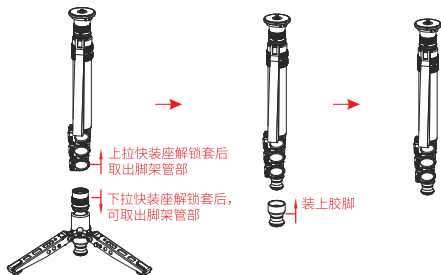



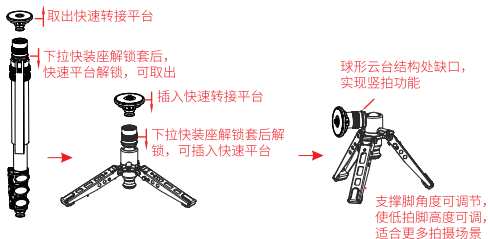






## 8. 可以拆分成低角度拍摄三脚架



## AM-404FL 专业快拆独脚架参数

		mm/inch	最小管径 mm/inch	独脚架最大高度 mm/inch	独脚架最小高度 mm/inch	无支撑脚最大高度 mm/inch	无支撑脚最小高度 mm/inch
AM-404FL	4	36/1.42	25/0.98	1900/74.80	730/28.74	1790/70.47	610/24.02
	自身重量 kg/lb	最大负重 kg/lb					
	1.40/3.09	12/26.45					

## 注意事项:

-  不要超过最大的制定负重 (请参考个别产品说明);
-  当使用产品时, 时常紧锁其安全装置;
-  切勿在温度低于零下40摄氏度及高于100摄氏度使用, 当在潮湿、沙地、布满尘埃的环境下使用后, 谨记将产品弄干及清洁, 不建议在海水中使用;
-  切勿将产品长时间放在太阳下暴晒及避免高温环境, 例如长时间放在车厢内或玻璃后;
-  在公众地方使用时, 如在没有人照料下, 切勿留下设备而引致其他公众不便;
-  建议在运输过程中, 将设备 (例如相机) 从脚架上移除;
-  使用温和清洁剂及柔软毛巾清洁, 将尘埃及沙粒从所有锁制及活动部件清除;
-  除非有需要, 此设备无需定期添加润滑油, 如确实需要时, 请使用标准润滑油或油蜡;
-  为自身安全着想, 切勿将产品接触任何电源。



## 温馨提醒

1. 在使用脚架拍摄且需要移动位置时, 请将相机从三脚架上取下, 切勿将相机装在脚架上一起移动, 剧烈的晃动 (特别是安装了长焦镜头的相机) 可能会使转接螺丝断裂, 进而损坏相机。
2. 伸展脚管时, 请从最大管径的脚管到最小管径的脚管的顺序伸展; 收纳脚管时, 请从最小管径的脚管到最大管径的脚管的顺序收纳。



# 保修卡



## 尊敬的顾客：

感谢您购买思锐的产品！在正常使用过程中，如果因器材本身的材料及工艺出现质量问题，思锐将会提供免费的保修服务。在需要保修服务时，请提供本保修卡和购买凭证（收据或发票，须有商家盖章），思锐公司售后服务热线：400 830 2299

产品名称	保修期限
脚架	6年
云台	
防潮柜本体	
电子部分	3年

产品型号：\_\_\_\_\_ 购买日期：\_\_\_\_\_

商店名称：\_\_\_\_\_ 商店电话：\_\_\_\_\_

商店地址：\_\_\_\_\_

商店盖章：\_\_\_\_\_

## 顾客须知：

1. 思锐产品，享受6年免费保修（电子部分为3年），保修时间从购买之日算起；
2. 所保修产品，必须是思锐正式授权的经销商或电子商务处购买；
3. 需邮寄回思锐工厂维修的，请先拨打思锐服务电话，待确认故障后，思锐公司承担来回运费。一般性故障可在7个工作日内完成维修并寄回；

4. 防潮柜的保修：请先确定发生问题的部件，把该部件卸下单独邮寄回思锐工厂维修即可。具体可参照使用说明书或致电服务热线。

5. 以下情况不在保修范围：

- ① 超过保修期限的；
- ② 在非思锐正式授权经销商处购买的；
- ③ 在未被思锐授权的代理商或维修中心维修过的；
- ④ 由于不正当操作、意外时间、自然灾害导致的故障或损伤。

※ 本保修卡只限在中国大陆使用

维修登记表

用户姓名	
用户电话	
用户地址	
邮编	
故障维修描述	
维修人员签名	
维修时间	